




## Branch-Cable

For Power Optimizer Input

SE-CBY

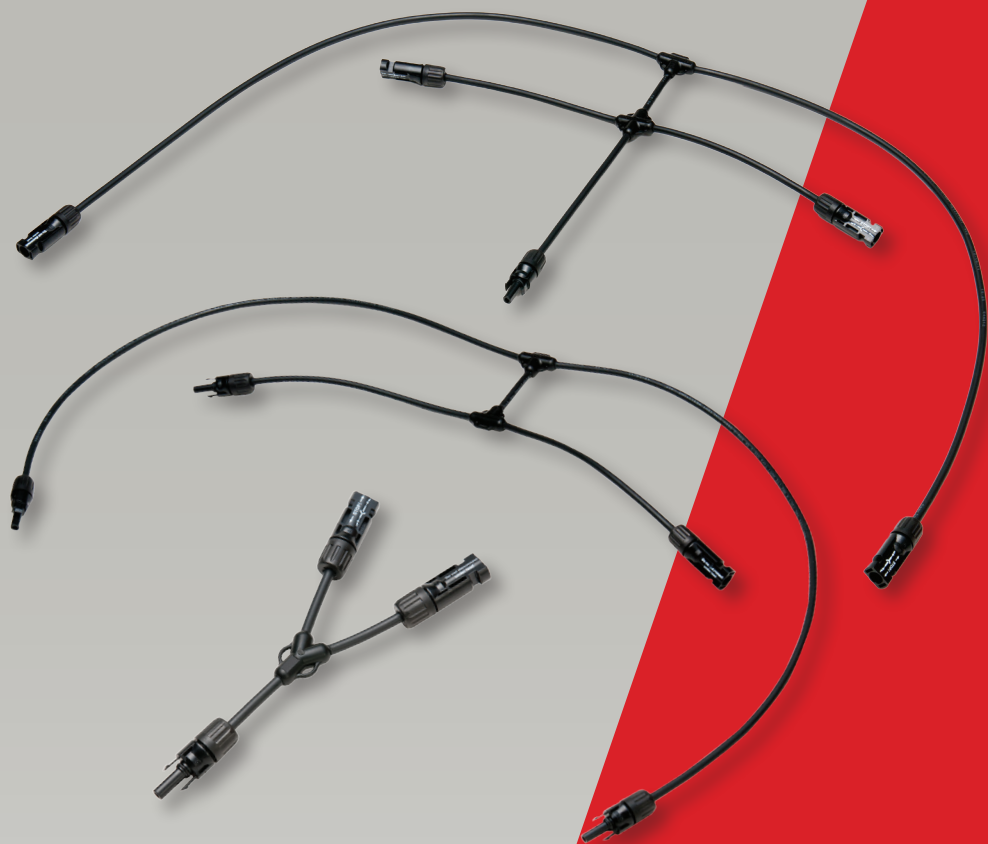

ACCESSORIES

### Ideal solution for low power modules

- Allows to connect 2-4 modules in parallel to a single power optimizer
- Utilize power optimizers to their full power rating
- Double insulated PV wire
- Multi-contact MC4 connectors





# Branch-Cable For Power Optimizer Input

SE-CBY


## 2-Module Branch Cable

Part number: SE-CBY-2MM  
(20 male units & 20 female units in each package)

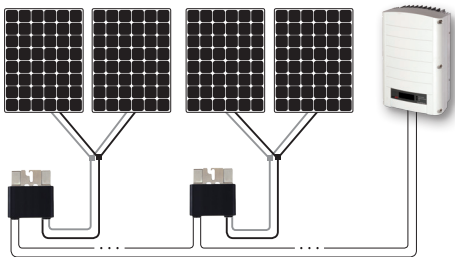



## 3-Module Branch Cable

Part number: SE-CBY-3MM  
(10 male units & 10 female units in each package)

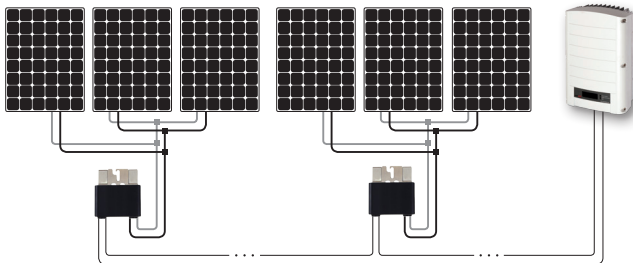

## 4-Module Branch Cable

Part number: SE-CBY-4MM  
(10 male units+ 10 female units in each package)

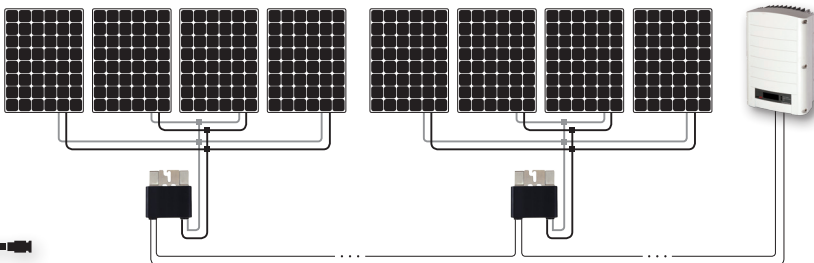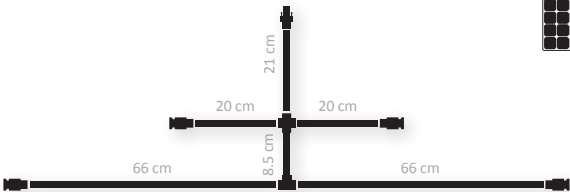

| CONNECTOR              |                       |     |
|------------------------|-----------------------|-----|
| Input Connector        | Multi-contact MC4     |     |
| Output Connector       | Multi-contact MC4     |     |
| WIRE                   |                       |     |
| Maximum System Voltage | 600 (UL) / 1000 (IEC) | Vdc |
| Maximum Current        | 30                    | A   |
| Wire Size              | 4                     | mm2 |
| Rated Temperature      | -40 – 90              | °C  |

RoHS