


GC15DT-DEKA

SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	243 Ah
Capacity at C/20	230 Ah
Capacity at C/6	181 Ah
Weight	63 lbs. (28.6 kg)
Container/Cover	Polypropylene
Operating Temperature Range	60°F (16°C) - 120°F (49°C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.40 - 2.45 VPC
Float	2.30 - 2.35 VPC
Vent	Individual quarter—turn bayonet vent cap
Self Discharge	1% per week
Terminal	U (SAE/STUD)



Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:


Flooded Battery, Wet type



DIMENSIONS

Length (mm)	10.25 (260 mm)
Width (mm)	7.13 (181 mm)
Height (mm)	10.88 (276 mm)

Depth of Discharge vs. Cycles

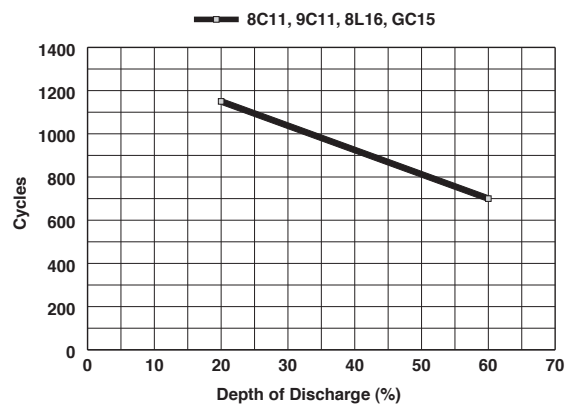

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

