

# HEYClip™ SunRunner® Cable Clip

## Double-Compression Design

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (2) Wires	PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum in.	Maximum in.	Minimum mm.	Maximum mm.				A x B		C	
						in.	mm.	in.	mm.	
.055	1,4	.125	3,2	.20" (5,0 mm)- .30" (7,6 mm) each cable	S6405	SunRunner Clip 100 Pack	.97 x .50	24,6 x 12,7	.39	9,9
					S6445	SunRunner Clip Bulk				

- Robust “double-compression” design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000 solar wires. Also for use with other cables from .20” (5,0 mm) to .30” (7,6 mm) in diameter.
- Heyco SunRunner clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead-in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.



SunRunner®

SunRunner® 90°


# HEYClip™ SunRunner® 90° Cable Clip

## Double-Compression, Right Angle Design

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (1) Wire	PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum in.	Maximum in.	Minimum mm.	Maximum mm.				A x B		C	
						in.	mm.	in.	mm.	
.055	1,4	.125	3,2	.20" (5,0 mm)- .30" (7,6 mm) each cable	S6406	SunRunner Clip 90° 100 Pack	.65 x .78	16,5 x 19,8	.39	9,9
					S6446	SunRunner Clip 90° Bulk				



- SunRunner 90° Cable Clip is designed to mount at a 90° angle to the original SunRunner. The SunRunner 90° will accommodate a single cable from .20” (5,0 mm) to .30” (7,6 mm).
- SunRunner 90° is designed for use with PV modules mounted in the “landscape” mode. PV modules with shorter than normal junction box cables cannot be dressed out to the sides of the module. The SunRunner 90° will allow the junction box cables to be run to the adjacent modules across the short side of the PV module frame.

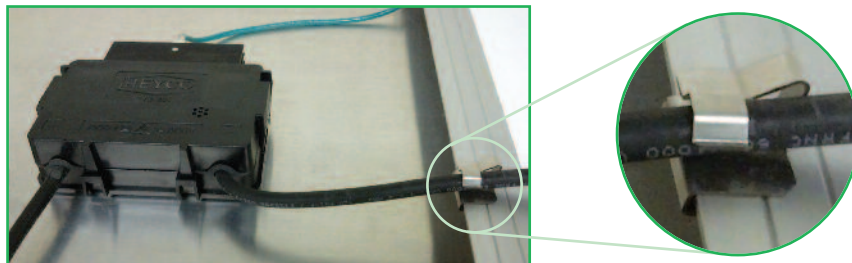

Material .025” thick 304 stainless steel

Quick  
Specs