



# Integrated Battery Rack

- **Ideal for Use with OutBack Radian, FLEXpower and FLEXcoupled Systems**
- **Fast Installation**
- **Supports Multiple 48-Volt Strings of OutBack EnergyCell RE or GH AGM Batteries**
- **Overcurrent Protection on Each Battery String Provides Added Safety and Flexibility**
- **Well-Ventilated for Increased Battery Safety and Longevity**
- **Protective Terminal Covers**
- **Space-Saving Design with Smaller Footprint**
- **Designed to Meet UL1741**



**IBR-2-48-175**



**IBR-3-48-175**

With the PV energy storage market expected to reach nearly \$30 billion USD by 2017\* and interest growing for smarter grid-interactive and AC-coupled systems, the demand for more versatile, flexible and cost-effective battery-bank deployment solutions for commercial and residential systems is increasing as a result. OutBack Power has responded with a line of preassembled battery racks designed to meet the needs of system integrators and installers and provide the best of both worlds: OutBack quality in a more easily specified and installed package.

The innovative OutBack Integrated Battery Rack system is a comprehensive battery enclosure which includes all cell interconnects, cabling, and series string over current protection and disconnects. All electrical connections are made at the factory and ship fully assembled with the exception of the batteries, which can be quickly added and connected on the jobsite, making the Integrated Battery Rack uniquely easy to specify, order and install.

Unlike typical steel racks or sheet-metal enclosures, the OutBack design is crafted of powder coated aluminum, resulting in a cleaner appearance able to withstand the most challenging environments—while weighting less than 90 pounds. The 2-shelf IBR-2 is sized to fit under an OutBack Radian inverter/charger to reduce system component “clutter” and make the best use of installation space. Clear covers on the racks permit visual inspection of internal components while providing additional protection for the batteries and electrical connections.

\* IHS Research 2013 report, “The Potential for Energy Storage in the PV Industry”

# Integrated Battery Rack Specifications

	<b>IBR-3-48-175</b>	<b>IBR-2-48-175</b>
<b>Dimensions (H x W x D)</b>	48.6 x 27.0 x 24.4" (123.4 x 68.6 x 61.9 cm)	33 x 27.0 x 21.25" (83.8 x 68.6 x 54 cm)
<b>Weight</b>	89 lbs (40.4 kg) without batteries	60 lbs (27 kg) without batteries
<b>Physical</b>	0.125-inch thick aluminum enclosure with FLEXware silver finish; plated copper bus bars and clear protective covers. Ships fully assembled (except for batteries)	0.125-inch thick aluminum enclosure with FLEXware silver finish; plated copper bus bars and clear protective covers. Ships fully assembled (except for batteries)
<b>String Overcurrent Protection</b>	175 Amps DC	175 Amps DC
<b>Gauge of conductors</b>	1/0 AWG	1/0 AWG
<b>Capacity</b>	Up to twelve (12) EnergyCell batteries	Up to eight (8) EnergyCell batteries
<b>Nominal System Voltage</b>	48 VDC	48 VDC
<b>Supported batteries*</b>	EnergyCell 200RE, EnergyCell 170RE, EnergyCell 200GH	EnergyCell 200RE, EnergyCell 170RE, EnergyCell 200GH

\* Batteries are sold separately

## AC-Coupling System




**Radian GS8048 & GSLC175-AC-120/240**



**IBR-2-48-175**

Available From:

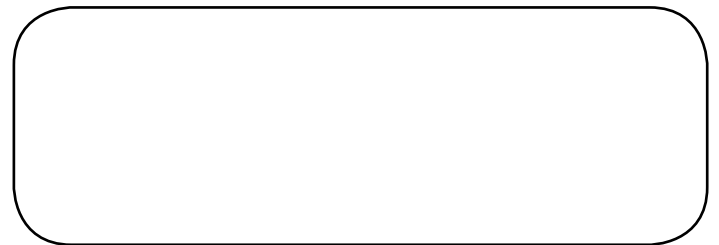

**Corporate Office:**  
 17825 59th Ave. NE, Suite B  
 Arlington, WA 98223 USA  
 Phone: +1 360 435 6030  
 Fax: +1 360 435 6019

**European Office:**  
 Hansastrasse 8  
 D-91126  
 Schwabach, Germany  
 Phone: +49 9122 79889 0  
 Fax: +49 9122 79889 21

**Asia Office:**  
 Suite 1903, Tower 1, China Hong Kong City  
 33 Canton Road, Kowloon  
 Hong Kong  
 Phone: +852 2736 8663  
 Fax: +852 2199 7988

**Latin American Office:**  
 15105 Cedar Bluff Pl.  
 Wellington, FL 33414 USA  
 Phone: +1 561 792 9651  
 Fax: +1 561 792 7157